


19. 07. 2004



Patents Office
Government Buildings
Hebron Road
Kilkenny

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)



I HEREBY CERTIFY that annexed hereto is a true copy of documents filed in connection with the following patent application:

Application No. S2003/0471

Date of Filing 26 June 2003

Applicant PETER J. FITZPATRICK, an Irish citizen of 37
Ash Grove, Fethard- On-Sea, County Wexford,
Ireland.

Dated this 29 day of June 2004.

An officer authorised by the
Controller of Patents, Designs and Trademarks.

BEST AVAILABLE COPY

**REQUEST FOR THE GRANT OF A PATENT
PATENTS ACT, 1992**

The Applicant named herein hereby request

- ☐ the grant of a patent under Part II of the Act
- ☒ the grant of a short-term patent under Part III of the Act

on the basis of the information furnished hereunder.

1. APPLICANT(S)

Name(s) and Address(s) FITZPATRICK, PETER J.
37 Ash Grove,
Fethard-On-Sea
County Wexford
Ireland

Description Nationality: An Irish Citizen

2. TITLE OF INVENTION

"A Fire Fighting Apparatus"

**3. DECLARATION OF PRIORITY ON BASIS OF PREVIOUSLY FILED
APPLICATION FOR SAME INVENTION (SECTIONS 25 & 26)**

Previous filing date

Country in or for
which filed

Filing No.

NONE

4. IDENTIFICATION OF INVENTOR(S)

Name(s)/Address(es) and Nationality of person(s) believed by Applicant(s) to be the inventor(s)

FITZPATRICK, PETER J 37 Ash Grove, Fethard-On-Sea, County Wexford, Ireland

5. STATEMENT OF RIGHT TO BE GRANTED A PATENT (SECTION 17(2)(B))

By virtue of the Applicant being the Inventor

contd

6. **ITEMS ACCOMPANYING THIS REQUEST - TICK AS APPROPRIATE**

- (i) ☒ prescribed filing fee (€60.00)
- (ii) ☐ specification containing a description and claims
- ☒ specification containing a description only
- ☒ Drawings referred to in description or claims
- (iii) ☐ An abstract
- (iv) ☐ Copy of previous application(s) whose priority is claimed
- (v) ☐ Translation of previous application whose priority is claimed
- (vi) ☐ Authorisation of Agent (this may be given at 8 below if this Request is signed by the Applicant(s))

7. **DIVISIONAL APPLICATION**

The following information is applicable to the present application which is made under Section 24 -

Earlier Application No:
Filing Date:

8. **AGENT**

The following is authorised to act as agent in all proceedings connected with the obtaining of a Patent to which this request relates and in relation to any patent granted -

Name
F. R. KELLY & CO.

Address
at their address as recorded for the time being in
the Register of Patent Agents

9. **ADDRESS FOR SERVICE (IF DIFFERENT FROM THAT AT 8)**

PETER J. FITZPATRICK

F. R. KELLY & CO.

By:

[Signature]
EXECUTIVE

Date: June 26, 2003

**TRUE COPY
AS
LODGED**

1

A Fire Fighting Apparatus

This invention relates to an apparatus for fighting a fire.

5

Known apparatus for fighting a fire inside or outside a building includes fire extinguishers containing various chemicals as well as water, and ceiling-mounted water sprinklers. However, most sprinkler heads must sense a temperature of 200 degrees F or 85 degrees C before activation occurs, thereby giving the fire time to become extremely hot and, therefore, more difficult to extinguish. Also, what is not destroyed by fire will be destroyed by water in that room and the rooms below and adjacent thereto.

15

An object of the present invention is to provide a new fire-fighting apparatus that can be used independently or in conjunction with any of the known fire fighting apparatus, including those mentioned above.

20

Accordingly, the invention provides an apparatus for fighting a fire comprising a suspendible container having a perforated lower surface each of whose perforations is closed by a heat-sensitive membrane which is capable of rupture at an elevated temperature, the container containing a fire retardant material which is released upon rupture of the membrane, the apparatus further including an electric heater adjacent the membrane and a smoke detector controlling the heater such that upon the detection of smoke the heater is switched on to rupture the membrane.

25

30

- There is also provided, as a separate invention, an apparatus for fighting a fire comprising a suspendible container having a perforated lower surface each of whose
- 5 perforations is closed by a first heat-sensitive membrane which is capable of rupture at an elevated temperature, the container containing a fire retardant material which is released upon rupture of the membrane, the apparatus
- 10 further including at least one further heat-sensitive membrane embedded in the fire retardant material above the first membrane such that a respective layer of fire retardant material lies above each membrane, whereby upon
- 15 rupture of the first membrane the layer of fire retardant material immediately above it is released and the further membrane comes to rest upon the lower surface of the container, the layer of fire retardant material immediately above the further membrane being released only upon subsequent rupture of the further membrane.
- 20 The invention may be used for fighting and extinguishing fires inside and outside buildings and other structures such as in the home or office, at vehicle service stations or oil rigs, and in tunnels, aircraft or ships.
- 25 The invention can be constructed in the form of a ceiling tile or in the form of a novelty or ornament which could decorate the mantelpiece over a fireplace or over a cooker or hob or the like, or over a bed. The apparatus could be affixed in a known manner to the ceiling of an
- 30 office or a living room or kitchen or closet or even to the inside roof of the housing of a television set or other item of electrical equipment.

Embodiments of the invention will now be described, by way of example, with reference to the accompanying drawings, in which:

5

Fig. 1 is a cross-sectional side view of a ceiling tile embodying the invention.

10

Fig. 2 is a top perspective view of the tile of Fig. 1 omitting the heat-sensitive membrane and fire retardant material contained therein.

Fig. 3 is a bottom perspective view of the tile of Fig. 1.

15

Fig. 4 is a cross-sectional side view of a second ceiling tile embodying the invention.

20

Referring first to Figs. 1 to 3, a fire fighting apparatus according to one embodiment of the invention is in the form of a ceiling tile comprising a substantially flat panel-like tray 10 having a perforated base 12. The tray is preferably made of a lightweight perforated metal which is strengthened by veluring or creasing, a process known in the art. The tray shown in Figs. 1 to 3 is made to the same dimensions as a standard ceiling tile, but where the tile is to be used on the outside of a structure, such as under the canopy of the forecourt of a gasoline/petrol service station, it can be constructed to have a greater depth for containing a greater volume of fire retardant material. In general, these tiles can be

25

30

made in any size or shape to fit or replace any known drop/suspended ceiling tile infrastructure.

5 The base 12 is lined internally with a membrane 14, such as cellophane or the like, which normally closes the perforations 16 in the base but which ruptures at a predetermined elevated temperature, preferably about 55°C. A dry fire retardant powder 18 of a type which is used in fighting forest fires and is a composition of
10 monoammonium phosphate and ammonium sulphate is placed on the membrane 14 and fills the tray 10. The powder 18 may also include other materials such as antifreeze or the like for extreme weather conditions. The tray 10 has upwardly divergent sidewalls 20 to allow nesting of empty
15 trays for transport and storage.

In operation, one or more of the ceiling tiles 10 are suspended above the fire hazard or area to be protected from fire with the perforated base 12 being exposed on
20 the underside of the tile. Heat from a fire beneath the tile(s) will raise the temperature of the thin membrane material 14, causing it to rupture. The fire retardant powder 18 will then rain down through the now-open perforations 16 onto the source of the heat or flame and
25 abort the fire. Since the particular fire retardant mentioned above is a food additive, it is non toxic and indeed-harmless if swallowed or ingested, and it is friendly to the environment and biodegradable.

30 The clean-up following the extinguished fire is comparatively simple since the ceiling tile is replaced and the powder is just vacuumed up, allowing electrical

or other repairs to be made and day-to-day business allowed to continue on a normal basis.

5 In order to allow the device to operate in a high-ceiling environment where the flames may not reach the ceiling, such as warehouses, large public buildings, petrol stations and the like, an electric heater 22 is located on the base 12 below the membrane 14 and connected to a source of power (not shown) which may be batteries or the
10 mains. The heater 22 is controlled by a smoke detector 24 which is exposed through the base 12 to the atmosphere. The arrangement is such that the heater 22 is normally off, but when the presence of smoke triggers the smoke alarm 24 the latter switches on the heater 22.
15 Heat from the latter now ruptures the membrane 14 so that the fire retardant powder 18 is released as before.

The heater 22 is preferably of the elongated coil type and is separated by insulators from any metal
20 surroundings. However, electric heater elements of the kind used in cooking ovens, electric hobs, hot water heaters, space heaters, etc. could alternatively be used.

Although perhaps not so useful in naturally smoky
25 environments such as night clubs, the device incorporating the electric heater 22 and smoke detector 24 would be of importance in the areas of petrochemical manufacture and distribution, cruise ships, high rise office buildings, etc., where smoking is banned.
30

One possible disadvantage of the above embodiment in some situations is that it is "one-shot", i.e. all the powder

18 is discharged upon rupture of the membrane 14. Thus, if the fire should re-ignite as sometimes occurs, or if the fire is not put out by the initial discharge of powder, no further powder is available to put out the flames. This disadvantage is overcome by the embodiment shown in Fig. 4.

In the Fig. 4 embodiment, the tray 100 has a greater depth than the tray 10. A second heat-rupturable membrane 14A, similar to the membrane 14, is embedded in the fire retardant powder 18 above the first membrane 14 such that a respective layer 18', 18" of the powder 18 lies above each membrane 14, 14A. Now, upon rupture of the first membrane 14 only the layer 18' of fire retardant powder immediately above it is released, so that the second membrane 14A comes to rest upon the base 12 through the action of gravity on the layer of powder 18". Thus the membrane 14A now takes the place of the first membrane 14 and the second layer of powder 18" is available for release should this second membrane 14A be ruptured.

Of course, more than two heat-rupturable membranes 14, 14A can be used, each separated from its overlying neighbour by a respective layer of the powder 18, so that multiple layers of powder are successively discharged as their supporting membranes are ruptured, until the fire is brought under control. Multiple layering would be especially effective in situations where petrochemical or gas or oil is on fire, since it would minimise the effect of the fire until the fuel feeding the fire is shut off. The embodiment shown in Fig. 4 may also include an

electric heater and smoke detector arranged as described for Figs. 1 to 3.

5 In general the suspendible container containing the fire retardant material can be any shape or size to suit the situation sought to be protected. It can be a strictly utilitarian item, such as the ceiling tile described, or it may have a decorative, novelty or ornamental function. Although a single membrane 14 covering all the
10 perforations 16 has been described, the perforations may be individually closed off.

The apparatus could also be made small enough to fit inside the housing of an item of electrical equipment,
15 for example in the roof of a television set or inside an electrical junction box.

The invention is not limited to the embodiments described herein which may be modified or varied without departing
20 from the scope of the invention.

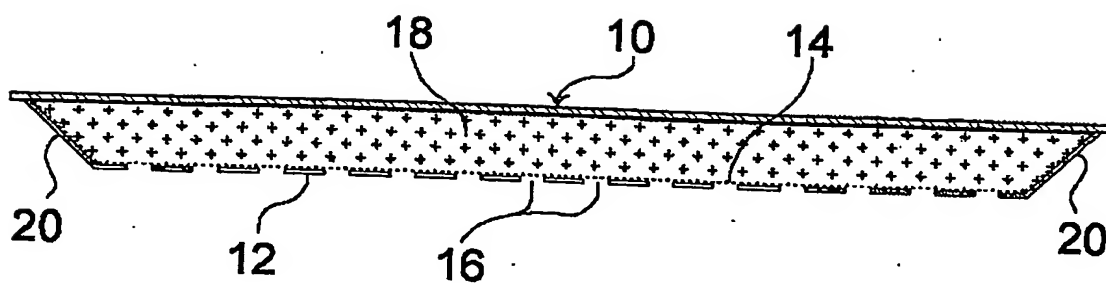


Fig. 1

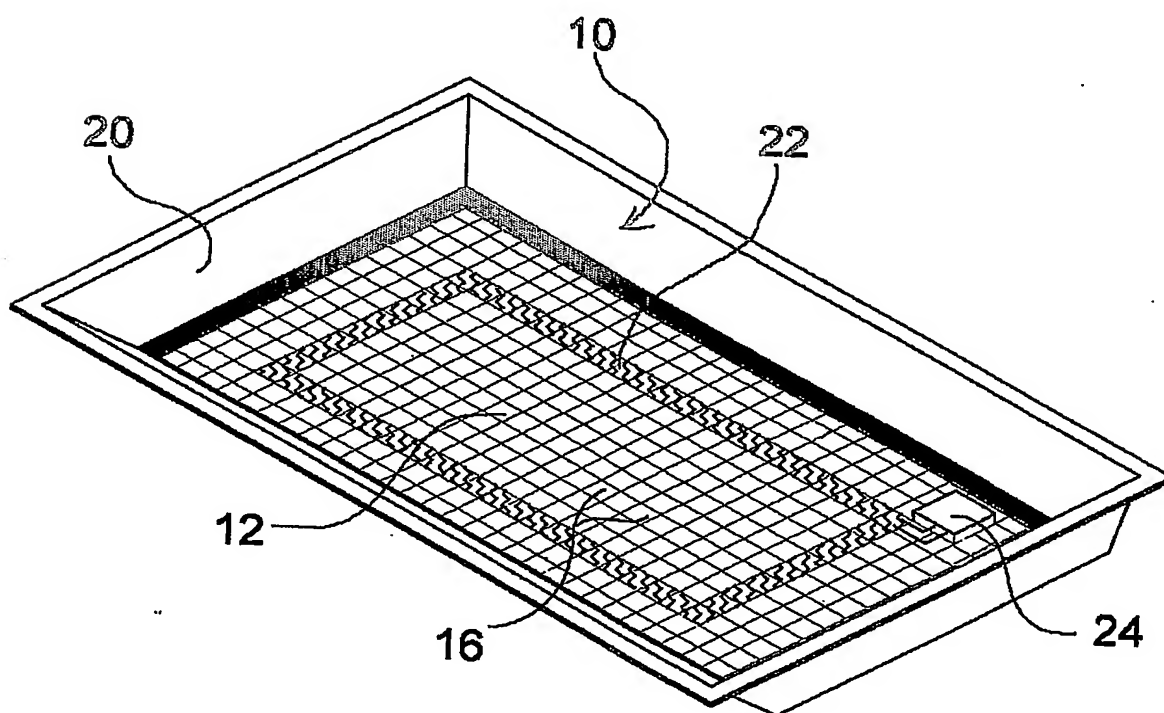


Fig. 2

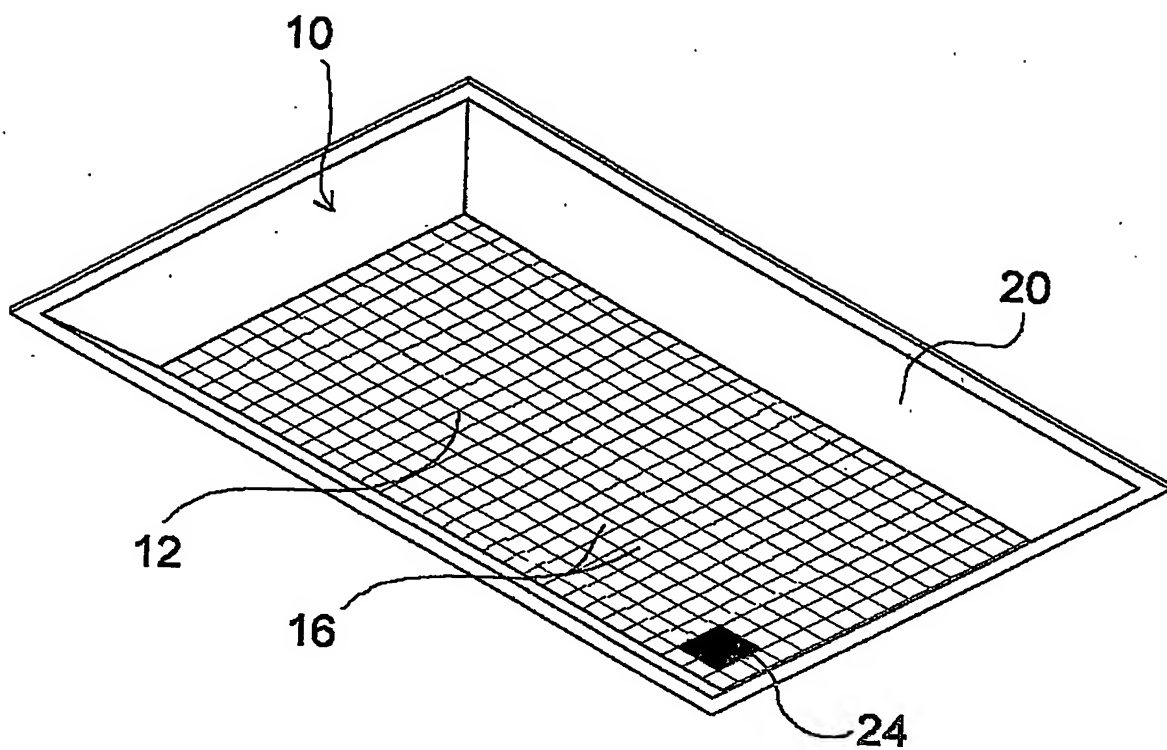


Fig. 3

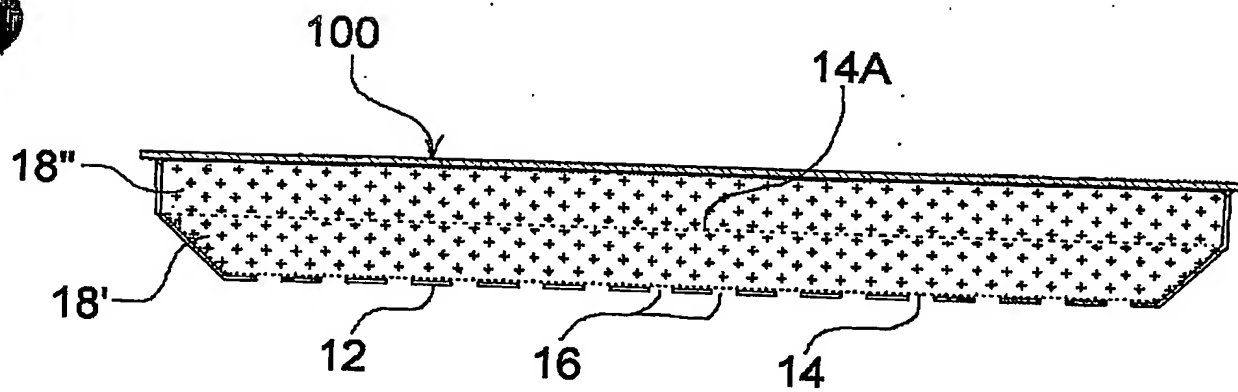


Fig. 4

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.